




PERFORMANCE DIAGRAM at $\Delta T=86^{\circ}\text{F}$

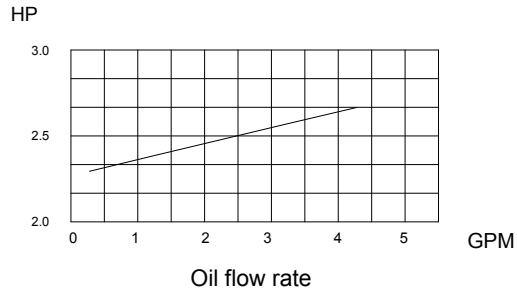

Model	Voltage V	Frequency Hz	Current A	Motor Speed rpm	Oil flow GPM	Air Flow m3/h	Protection IP	Noise dB(A)	Weight lbs
AW0608L-CD1	12 VDC		2.5	3350	0.5+4.75	500	54	51	5.2
AW0608L-CD2	24 VDC		0.58			420			
AW0608L-CA1	115 VAC	50/60	0.6/0.5	2850/3450		457/553	54	42/48	
AW0608L-CA2	230 VAC	50/60	0.27/0.23						
AW0608L-CA3	380 VAC	50/60							

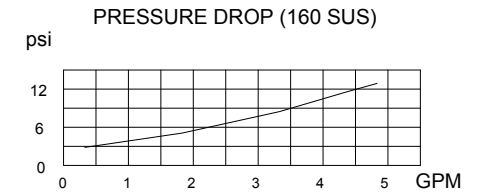

MAX. WORKING PRESSURE 217 psi

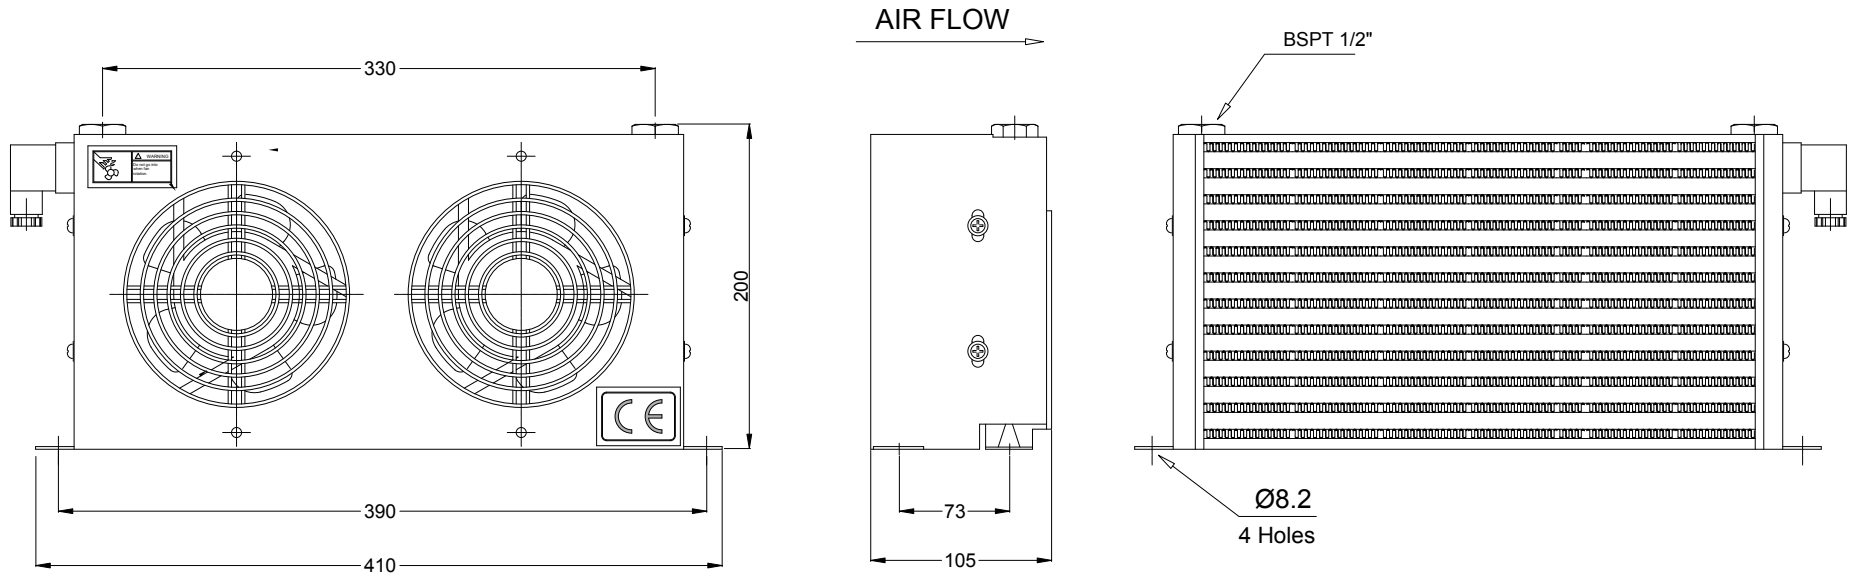

Model
AIR-OIL COOLER
AW0608L-C MODEL

Drawing N.
AW0608L-C

Material
Aluminum

Universal Hydraulics International, Ltd
 9337 Ravenna Rd, Unit G
 Twinsburg, OH 44087
 P: 330-405-1800
 F: 330-405-1801
<http://www.uhild.com>